

# → Series 2183

### ■ SUITABLE FOR

Liquids	neutral and non-neutral	
Air, gases and vapours	neutral and non-neutral	



### ■ EXAMPLES OF USE

Dirt trap in straight-through form for use on cryogenic tanks, cryogenic containers, transport containers and systems for the production, storage and transport of cryogenic liquefied gases such as LIN, LOX, CO<sub>2</sub>, LAr, LNG.

- N<sub>2</sub> in pharmaceutical / foodstuffs applications
- O<sub>2</sub> for medical supply equipment
- CO<sub>2</sub> for foodstuffs/ industrial applications
- LAr for welding
- Cooling plants

**The fittings are always manufactured free of oil and grease.**



### ■ MATERIAL



### ■ SPECIFICATION



DN 10 - DN 50



-196°C to +120°C



PN 63

### ■ APPROVALS

EU type examination

TR ZU 032/2013 - TR ZU 010/2011

#### Requirements

DGR 2014/68/EU

UK PESR 2016 No. 1105

### ■ MATERIAL

Component	Material	DIN EN	ASME
Body	Gunmetal	CC499K	CC499K
Valve upper section	Stainless steel	1.4408 / 1.4404	CF8M / 316L
Screws	Stainless steel	1.4301	304
Seal valve upper section	PTFE mod.	PTFE mod.	PTFE mod.
Strainer	Stainless steel	1.4301	304

s	Standard	for neutral and non-neutral media
---	----------	-----------------------------------

■ MEDIUM

GF	gaseous and liquid	Cryogenic liquified gases, vapours and liquids, for gaseous oxygen maximum 40 bar / maximum 60 C
----	--------------------	--

■ MESH SIZE STRAINER

025	Mesh size 250µm (standard)
010	Mesh size 100µm (on request)

■ MATERIAL STRAINER

	Material	DIN EN	ASME
01	stainless steel	1.4301	304

other materials available on request.

■ AVAILABLE NOMINAL DIAMETERS AND CONNECTION SIZES

Nominal diameter DN	10	15	20	25	32	40	50
Inlet	3/8" (10)	1/2" (15)	3/4" (20)	1" (25)	1 1/4" (32)	1 1/2" (40)	2" (50)
Outlet	3/8" (10)	■					
	1/2" (15)		■				
	3/4" (20)			■			
	1" (25)				■		
	1 1/4" (32)					■	
	1 1/2" (40)						■
	2" (50)						

■ TYPE OF CONNECTION INLET / OUTLET

LM1 / LM1	soldering socket LM1 / soldering socket LM1	DIN EN ISO 1127 / DIN EN ISO 1127
LM2 / LM2	soldering socket LM2 / soldering socket LM2	ASTM A312 S10 / ASTM A312 S10
LM3 / LM3	soldering socket LM3 / soldering socket LM3	ASTM A312 S40 / ASTM A312 S40
LM4 / LM4	soldering socket LM4 / soldering socket LM4	DIN EN 12449 / DIN EN 12449
f / f	female thread BSP-P / female thread BSP-P	DIN EN ISO 228-1 / DIN EN ISO 228-1
NPT-f / NPT-f*	female thread NPT / female thread NPT	ANSI B1.20.1 / ANSI B1.20.1

\* Threaded connection and other connections on request.

■ DIMENSIONS AND ORDERING CODE FOR PIPE CONNECTIONS


Nominal diameter	DN	10*	15*	20*	25	32*	40	50*
Connection type for pipes according to DIN EN ISO 1127	D	17,2	21,3	26,9	33,7	42,4	48,3	60,3
Dimensions for soldering socket LM1 / soldering socket LM1	e	2,3	2,6	2,9	3,2	3,2	3,6	3,6
Order code XX		CK	CL	CM	BN	CN	CO	CP
Connection type for pipes according to ASTM A312 S10	D	17,15	21,34	26,67	33,40	42,16	48,26	60,33
Dimensions for soldering socket LM2 / soldering socket LM2	e	1,65	2,11	2,11	2,77	2,77	2,77	2,77
Order code XX		AS	AU	AW	AY	BA	BC	BE
Connection type for pipes according to ASTM A312 S40	D	17,15	21,34	26,67	33,40	42,16	48,26	60,33
Dimensions for soldering socket LM3 / soldering socket LM3	e	2,31	2,77	2,87	3,38	3,56	3,68	3,91
Order code XX		AT	AV	AX	AZ	BB	BD	BF
Connection type for pipes according to DIN EN 12449	D	12	15	18	22	28,00	35	42,00
Dimensions for soldering socket LM4 / soldering socket LM4	e	1	1,5	1,5	1,5	1,50	1,50	2
Order code XX		AA	AC	BH	BI	BJ	BK	BL

\* Available from 2023.

■ NOMINAL DIAMETERS, CONNECTIONS, INSTALLATION DIMENSIONS

Series 2183: Connection, installation dimensions									
Nominal diameter	DN	10	15	20	25	32	40	50	
Pressure level	PN	63	63	63	63	63	63	63	
Operating pressure	bar	63	63	63	63	63	63	63	
Threaded connection	G	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2
Installation dimensions in mm	L	60	85	85	115	115	140	160	
	b	6	6	8	8	10	13	20	
	A	75	77	74,5	79	106	104	106,5	
Weight	kg	0,7	0,9	1,2	1,4	2,2	3,1	4,7	
Kvs-value	m <sup>3</sup> /h	1,6	3,6	6,5	10,2	14	19,2	31	
Cv-value	gal/min	1,9	4,2	7,6	11,9	16,3	22,4	36,1	

■ MAIN DIMENSIONS, INSTALLATION DIMENSIONS

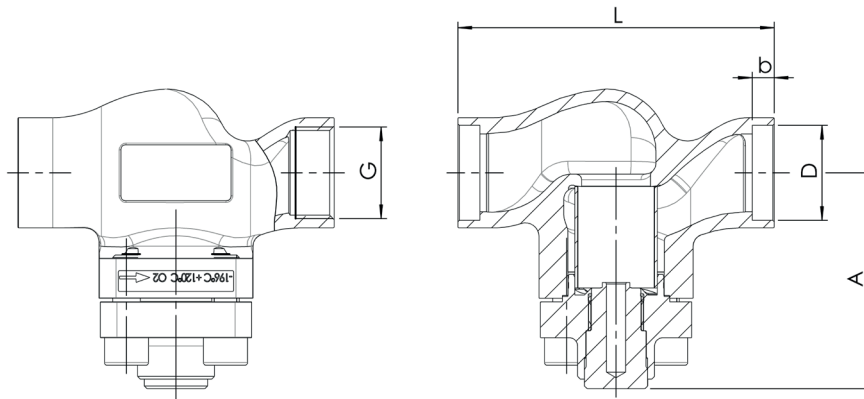

Series 2183 ■ INDIVIDUAL SELECTION / VALVE CONFIGURATION

Series	Valve version	Medium	Mesh size strainer	Material strainer	Nominal diameter DN	Connection type		Connection size
						Inlet	Outlet	Inlet / Outlet
2183	s	GF	025	01	25	LM4/LM4	LM4/LM4	BJ/BJ
2183	s	GF	016	01	40	f	f	40/40
2183								
2183								

■ CERTIFICATES / APPROVALS

<b>C01</b>	Factory certificate acc. DIN EN 10204 2.2 (WKZ 2.2)	<input type="checkbox"/>	<b>C06</b>	ATEX evaluation acc. to 2014/34/EU	<input type="checkbox"/>
<b>C02</b>	Test certificate acc. DIN EN 10204 3.1 (WPZ 3.1)	<input type="checkbox"/>	<b>C11</b>	Certification of the production process especially for gaseous oxygen applications by employment of specific materials	<input type="checkbox"/>
<b>C03</b>	Material test certificate acc. DIN EN 10204 3.1 (MPZ 3.1) (pressure retaining part)	<input type="checkbox"/>			<input type="checkbox"/>

■ ADMISSIONS / ACCREDITATIONS

<b>AA1</b>	EC Type examination acc. to Directive 2014/68/EU	<input type="checkbox"/>		<input type="checkbox"/>
<b>AA4</b>	EAC - certificate/declaration with passport for the valve and laser marking of the valve	<input type="checkbox"/>		<input type="checkbox"/>
<b>AA11</b>	UK Type examination acc. to Directive UK PESR 2016 No. 1105	<input type="checkbox"/>		<input type="checkbox"/>

■ ENQUIRY

Copy and send to: [order@goetze.de](mailto:order@goetze.de).